


MIDI



Startwell
www.startwell.com

Applications include:

Caterpillar
Cummins
Detroit
Man
Perkins
Scania
Volvo

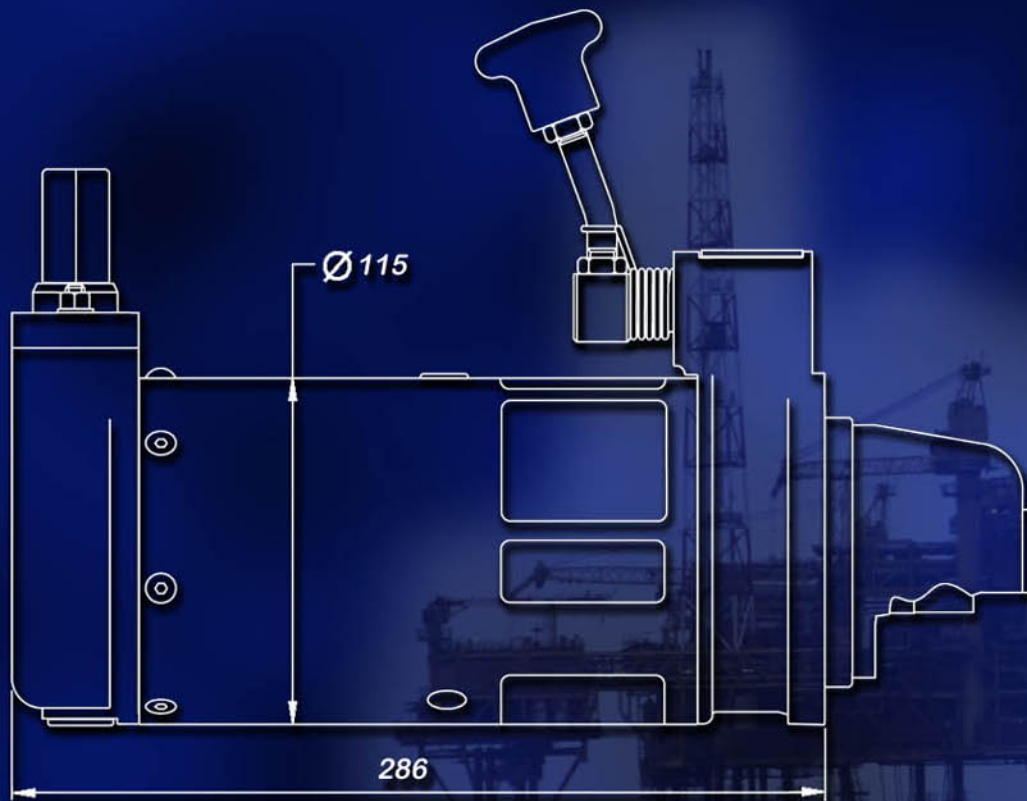

tel +44 (0) 20 8863 4450
fax +44 (0) 20 8863 4410

For further information see our web site:

www.startwell.com



Startwell Engineering (UK) Ltd.
Unit 1A Phoenix Trading Estate
Rosslyn Crescent
Harrow, Middlesex
London HA1 2SP

Midi Specification

Rotation: Model SDC Clockwise
Model SDA Anti-clockwise

Mounting: Flange mounted SAE 1; SAE 2;
SAE 3; SAE 4

Engine capacity: 1.1 litre/cyl, six cylinders maximum

Pinion Type: 11 to 13 teeth 10/12 F/stub
11 to 13 teeth 8/10 F/stub
9 to 13 teeth Mod 3
10 to 13 teeth Mod 2.5

Pinion to flange face: 20, 28, 47mm and other variations

Maximum torque at pinion: 115Nm (90 Ft.lb)

Maximum winding handle torque: 64 Nm (50Ft.lb)

Winding handle position: Variable in 8.5° increments

No. of turns to fully wind: Two turns to engage,
further 9.5 turns to fully charge

Weight: 18Kg

Cold Start: Starting aid below 5°

Finish: Marine finish as standard. Zinc plated body and housing. Powder coated paint all over to withstand marine environment. Electroless nickel plated shaft and pinion.

