


SUPER MAXI



Startwell
www.startwell.com

Applications include:

Caterpillar
Cummins
Detroit
Man
Perkins
Scania
Volvo

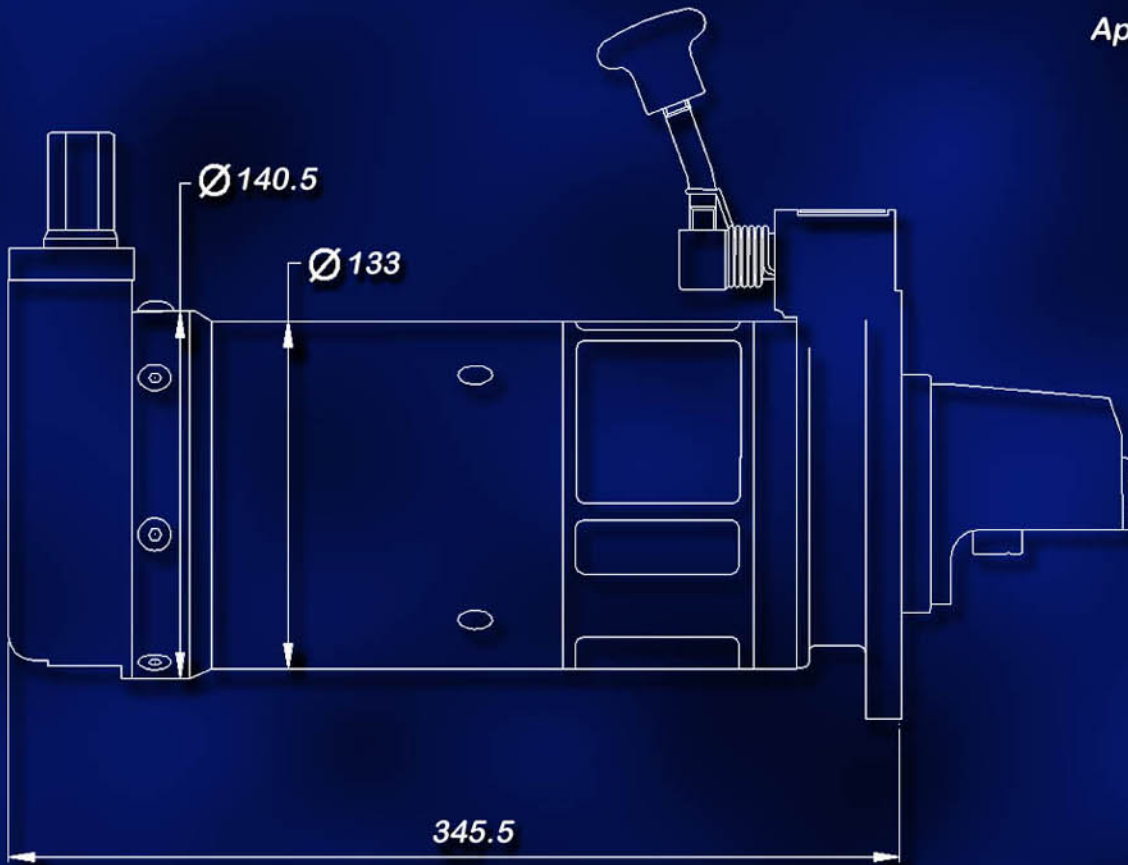

tel +44 (0) 20 8863 4450
fax +44 (0) 20 8863 4410

For further information see our web site:

www.startwell.com



Startwell Engineering (UK) Ltd.
Unit 1A Phoenix Trading Estate
Rosslyn Crescent
Harrow, Middlesex
London HA1 2SP

Super Maxi Specification

Rotation: Model SSXC Clockwise
Model SSXA Anti-clockwise

Mounting: Flange mounted SAE 1; SAE 2; SAE 3

Engine capacity: 2 litre/cyl, six cylinders maximum
1.5 litre/cyl, eight cylinders maximum

Pinion Type: 11 to 13 teeth 10/12 F/stub
11 to 13 teeth 6/8 F/stub
11 to 12 teeth 6/8 F/stub
11 to 13 teeth Mod 3

Pinion to flange face: 47mm (nominal)

Maximum torque at pinion: 163Nm (123 Ft.lb) - calculated

Maximum winding handle torque: 80 Nm (60Ft.lb) - measured

Winding handle position: Variable in 8.5° increments

No. of turns to fully wind: Two turns to engage,
further 16 turns to fully charge

Weight: 31Kg

Cold Start: Starting aid below 5°

Finish: Marine finish as standard. Zinc plated body and housing. Powder coated paint all over to withstand marine environment. Electroless nickel plated shaft and pinion.

